


Heatguard


Polycarbonate Corrugated Structured Sheet PCST 0007 6.0mm

REF CODE:
PCST_0007_60

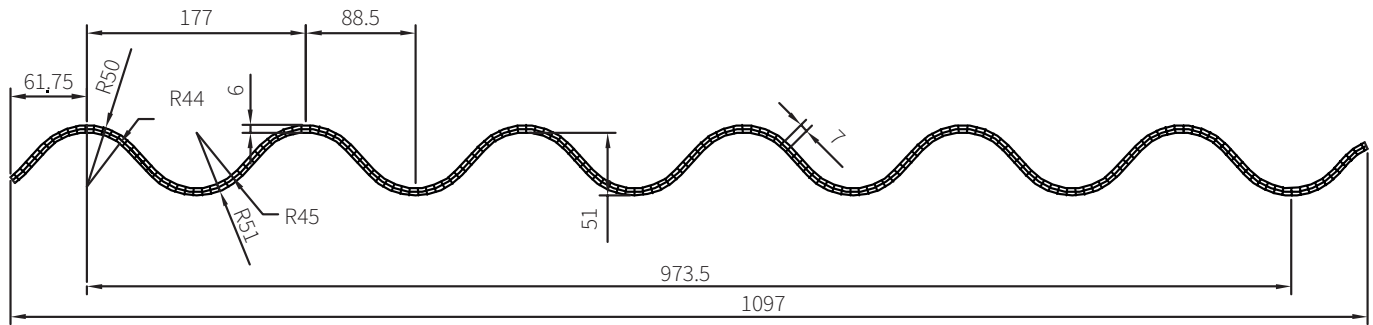

Span/load Table		
Load (kN/m ²)	Single Span (m)	End Span (m)
0.7	1.42	1.91
0.8	1.36	1.83
0.9	1.31	1.76
1.0	1.26	1.70
1.1	1.22	1.65
1.2	1.19	1.60
1.3	1.16	1.56
1.4	1.13	1.52
1.5	1.10	1.48
1.6	1.08	1.45
1.7	1.06	1.42

Safe span figures are based on a deflection limit of span/30 plus a safety factor of 1.2. It is assumed that the profile is crown fixed with at least six fixings at all purlins, including metal end laps onto the rooflight.

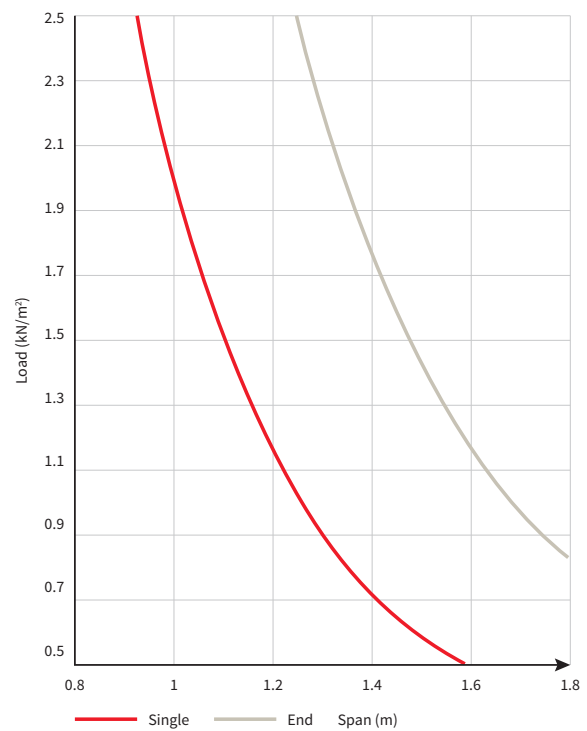

Transmission			Product Characteristics		Tolerances
Colour	Light	Solar	Width	1097mm	+/- 5mm
Clear	79%	75%	Length	Up to 5m Over 5m	-0/+10mm -0/+25mm
Opal	38%	44%	Thickness	6.0mm	-0/-0.05mm
Heatguard 100 (RG)	10%	10%	Sheet Weight	2.00kg/m ²	
Heatguard 50 (EGWRG)	20%	18%	U Value	3.33W/m ² K	
Heatguard 25 (GOQ)	36%	32%	Options	Double sided UV protection, Mitred corners, heat sealed edges	
Non-standard colours and sheet sizes are available subject to minimum order quantities.					

Heatguard

Polycarbonate Corrugated Structured Sheet PCST 0007 6.0mm

REF CODE:
PCST_0007_60

Heatguard

Heatguard corrugated multiwall polycarbonate sheet provides all the durability and impact resistance of corrugated polycarbonate sheet with the added insulation and rigidity provided by the multiwall structure. Co-extruded UV protection provides resistance against the effects of UV weathering. Heatguard can be used with fibre cement sheeting or as a complete roof and wall cladding material.

Quality

Manufactured under ISO 9001:2015 to EN 1013: 2012.

Handling & Safety

Do not step directly on the rooflight. Use stepping boards. Work according to local safety regulations.

Storage

Store in a shaded place, protect from direct sunlight and rain prior to installation. Avoid covering the sheets with heat absorbing materials. Avoid contact with chemicals. Protect the sheets from physical damage. Pallets should be stacked no more than three pallets high.

Installation

Make adequate allowance for thermal movement, nominally 3.5mm per metre. Holes drilled for fixings must be oversized. Sheet lengths must be limited to ensure there is no excessive movement at the end laps.

Service Temperature

Heatguard's mechanical performance is known to remain stable for prolonged service in temperatures ranging from -20 to +100°C (Short term unstressed -40 to +130°C).

Maintenance

In order to maintain this product in good condition it should be cleaned periodically using suitable detergent cleaning agents. Do not use solvent cleaners. Do not scrub with brushes or sharp implements. Avoid cleaning in hot sun or high temperatures.

Recycling

Heatguard is 100% recyclable and reusable if separated from other materials at the end of its life cycle - contact your local recycling centre for more information.

Additional Information

Separate datasheets are available; please contact the Technical Department for the most current information.

This information is given in good faith & is believed by Euronit to be accurate & reliable. Since the use of this information is not within Euronit's control, no warranty, expressed or implied is given. It is the users' responsibility to determine whether the product is appropriate for their purpose. Euronit pursues a policy of continuous product development and reserves the right to amend specification without notice. Etex Ireland Limited Kilkenny Road, Athy, Co. Kildare R14 VN84 Ireland. Tel: +353 (0)59 863 1316 E-mail: info.ireland@etexgroup.com